
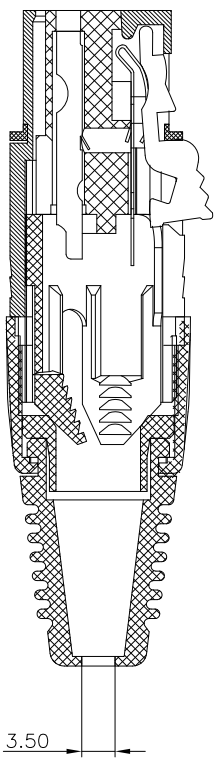
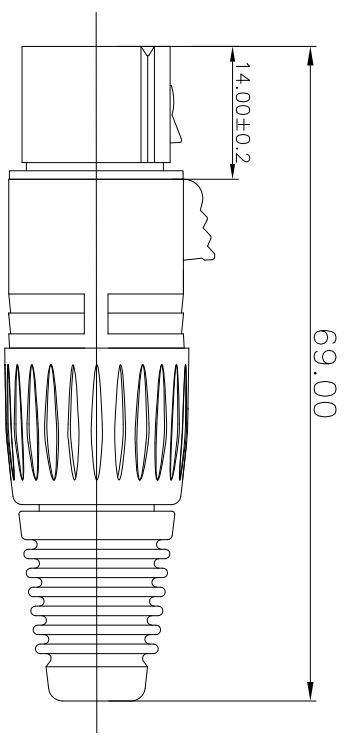


REV.	ECON NO.	MODIFIED MARK	APPROVED
A	—	FIRST RELEASE	



NOTES:
 ELECTRICAL:
 1:RATED CURRENT: 7.5 A MAX.
 2:RATED VOLTAGE: 50 V AC.
 3:INSULATION RESISTANCE: 2G OHMS MIN.
 4:DIELECTRIC WITHSTANDING VOLTAGE: 500 VAC MIN.
 MECHANICAL:
 1:INSERTION FORCE: 5N~40N
 2:WITHDRAWAL FORCE: 5N~40N.
 4:DURABILITY: 1000 CYCLES.
 ENVIRONMENTAL:
 TEMPERATURE RANGE: -30°C TO 80°C.

ANGLE	±5°	MODEL NAME:	PLF5-01
63 < L	±0.5	(PART NO.)	
16 < L ≤ 63	±0.4	MAT'L:	See table
4 < L ≤ 16	±0.3	FINISH:	See table
L ≤ 4	±0.2	Q'TY: /	
TOL TABLE:		DESIGN:	X.H.Wang 09/10'18
THIS DOCUMENT IS THE PROPERTY OF		CHECKED:	L.W.Wu 09/10'18
TRENPRO TECHNOLOGY CO., LTD.		APPROVED:	X.Q.Hu 09/10'18
NO PART THEREOF MAY BE REPRODUCED		UNIT:	mm
AND USED WITHOUT THE PRIOR WRITTEN		VIEW:	SCALE: 5:1
CONSENT OF THE OWNER		SHEET:	1/1
		SIZE:	A3

广东正宝科技有限公司
 GUANGDONG TRENPRO TECHNOLOGY CO., LTD.

TITLE: PLF PLUG
 DWG NO.:
 REV: A